

Two-Dimensional Finite-Difference Modeling of Broadband Regional Wave Propagation Phenomena: Validation of Regional Three- Dimensional Earth Models and Prediction of Anomalous Regional Phases

*P. Goldstein, F. D. Ryall, M. E. Pasyanos, C. A. Schultz,
W. R. Walter*

U.S. Department of Energy

Lawrence
Livermore
National
Laboratory

This article was submitted to
22nd Annual Seismic Research Symposium
New Orleans, LA
September 12-15, 2000

July 18, 2000

DISCLAIMER

This document was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor the University of California nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or the University of California. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or the University of California, and shall not be used for advertising or product endorsement purposes.

This is a preprint of a paper intended for publication in a journal or proceedings. Since changes may be made before publication, this preprint is made available with the understanding that it will not be cited or reproduced without the permission of the author.

This report has been reproduced directly from the best available copy.

Available electronically at <http://www.doc.gov/bridge>

Available for a processing fee to U.S. Department of Energy
And its contractors in paper from
U.S. Department of Energy
Office of Scientific and Technical Information
P.O. Box 62
Oak Ridge, TN 37831-0062
Telephone: (865) 576-8401
Facsimile: (865) 576-5728
E-mail: reports@adonis.osti.gov

Available for the sale to the public from
U.S. Department of Commerce
National Technical Information Service
5285 Port Royal Road
Springfield, VA 22161
Telephone: (800) 553-6847
Facsimile: (703) 605-6900
E-mail: orders@ntis.fedworld.gov
Online ordering: <http://www.ntis.gov/ordering.htm>

OR

Lawrence Livermore National Laboratory
Technical Information Department's Digital Library
<http://www.llnl.gov/tid/Library.html>

**TWO-DIMENSIONAL FINITE-DIFFERENCE MODELING OF BROADBAND REGIONAL
WAVE PROPAGATION PHENOMENA: VALIDATION OF REGIONAL THREE-
DIMENSIONAL
EARTH MODELS AND PREDICTION OF ANOMALOUS REGIONAL PHASES**

Peter Goldstein, Floriana D. Ryall, Michael E. Pasyanos, Craig A. Schultz, and William R. Walter

Lawrence Livermore National Laboratory

Sponsored by U.S. Department of Energy
Office of Nonproliferation Research and Engineering
Office of Defense Nuclear Nonproliferation
National Nuclear Security Administration

Contract No. W-7405-ENG-48

ABSTRACT

An important challenge for seismic monitoring of nuclear explosions at low magnitude to verify a nuclear-test-ban treaty is the development of techniques that use regional phases for detection, location, and identification. In order to use such phases, region-specific earth models and tools are needed that accurately predict features such as travel times, amplitudes, and spectral characteristics. In this paper, we present our efforts to use two-dimensional finite-difference modeling to help develop and validate regional earth models for the Middle East and North Africa and to develop predictive algorithms for identifying anomalous regional phases.

To help develop and validate a model for the Middle East and North Africa, we compare data and finite-difference simulations for selected regions. We show that the proposed three-dimensional regional model is a significant improvement over standard one-dimensional models by comparing features of broadband data and simulations and differences between observed and predicted features such as narrow-band group velocities.

We show how a potential trade-off between source and structure can be avoided by constraining source parameters such as depth, mechanism, and moment/source-time function with independent data.

We also present numerous observations of anomalous timing and amplitude of regional phases and show how incorporation of two-dimensional structure can explain many of these observations. Based on these observations, and the predictive capability of our simulations, we develop a simple model that can accurately predict the timing of such phases.

Key Words: wave propagation, three-dimensional earth models, regional seismic phases

Model validation and development

We are comparing data and numerical simulations of regional wave propagation at selected stations in the middle east and north Africa to validate and improve our regional earth model (MENA1.1, Walter et al., 2000) and begin development of model based correction surfaces for regional identification and discrimination. For example, we compare data and simulations for events at RAYN a broadband seismic station in Saudi Arabia (Figure 1).

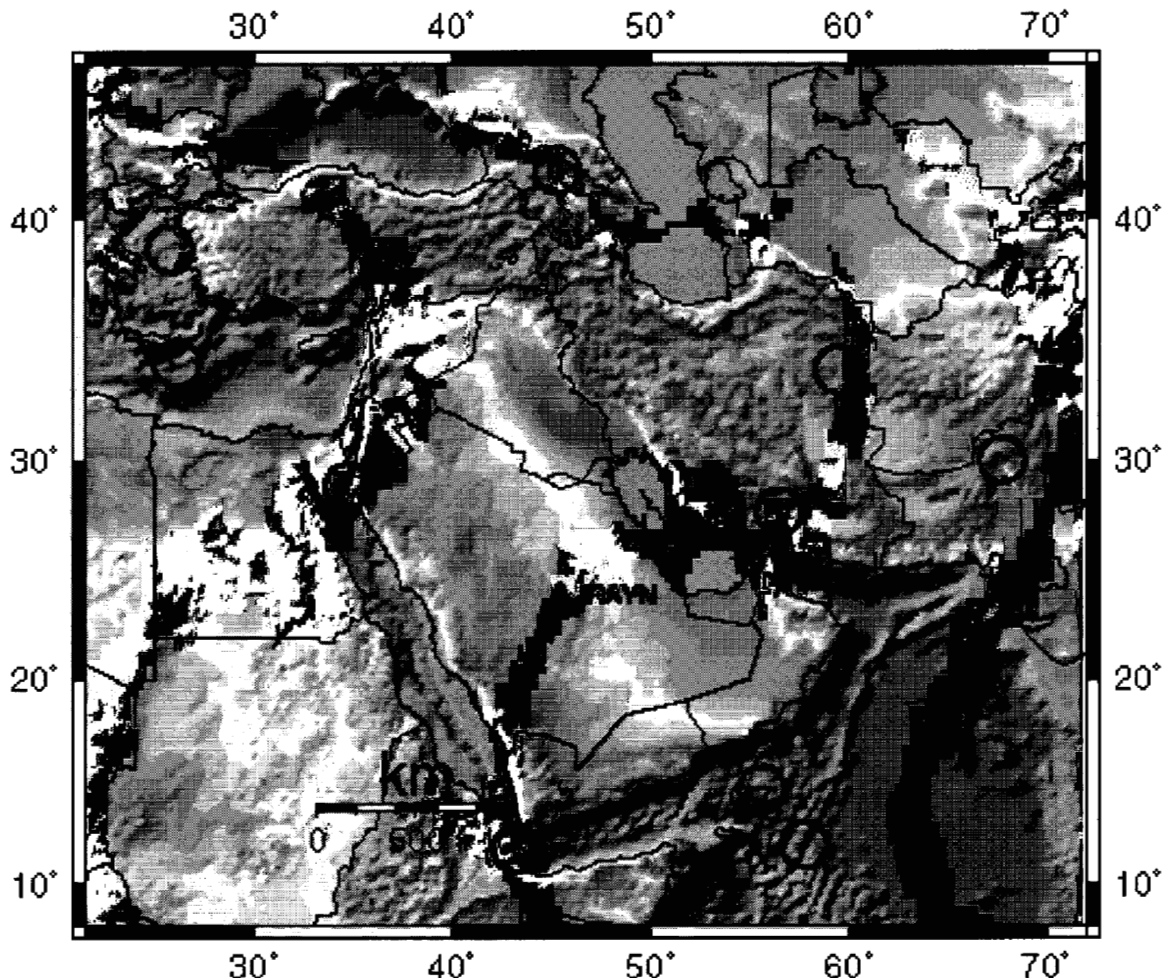


Figure 1, Map of selected events in the vicinity of RAYN. These events are being used to test and validate the MENA model.

Selected cross-sections and waveform comparisons are shown in Figure 2. In comparison to AK135 (the standard one-dimensional earth model used for most monitoring purposes) the MENA model generally produces a much better representation of the observed data. However, in some cases, results for the MENA model are similar to those of AK135 and differ significantly from the observed data. These differences indicate a need for additional calibration.

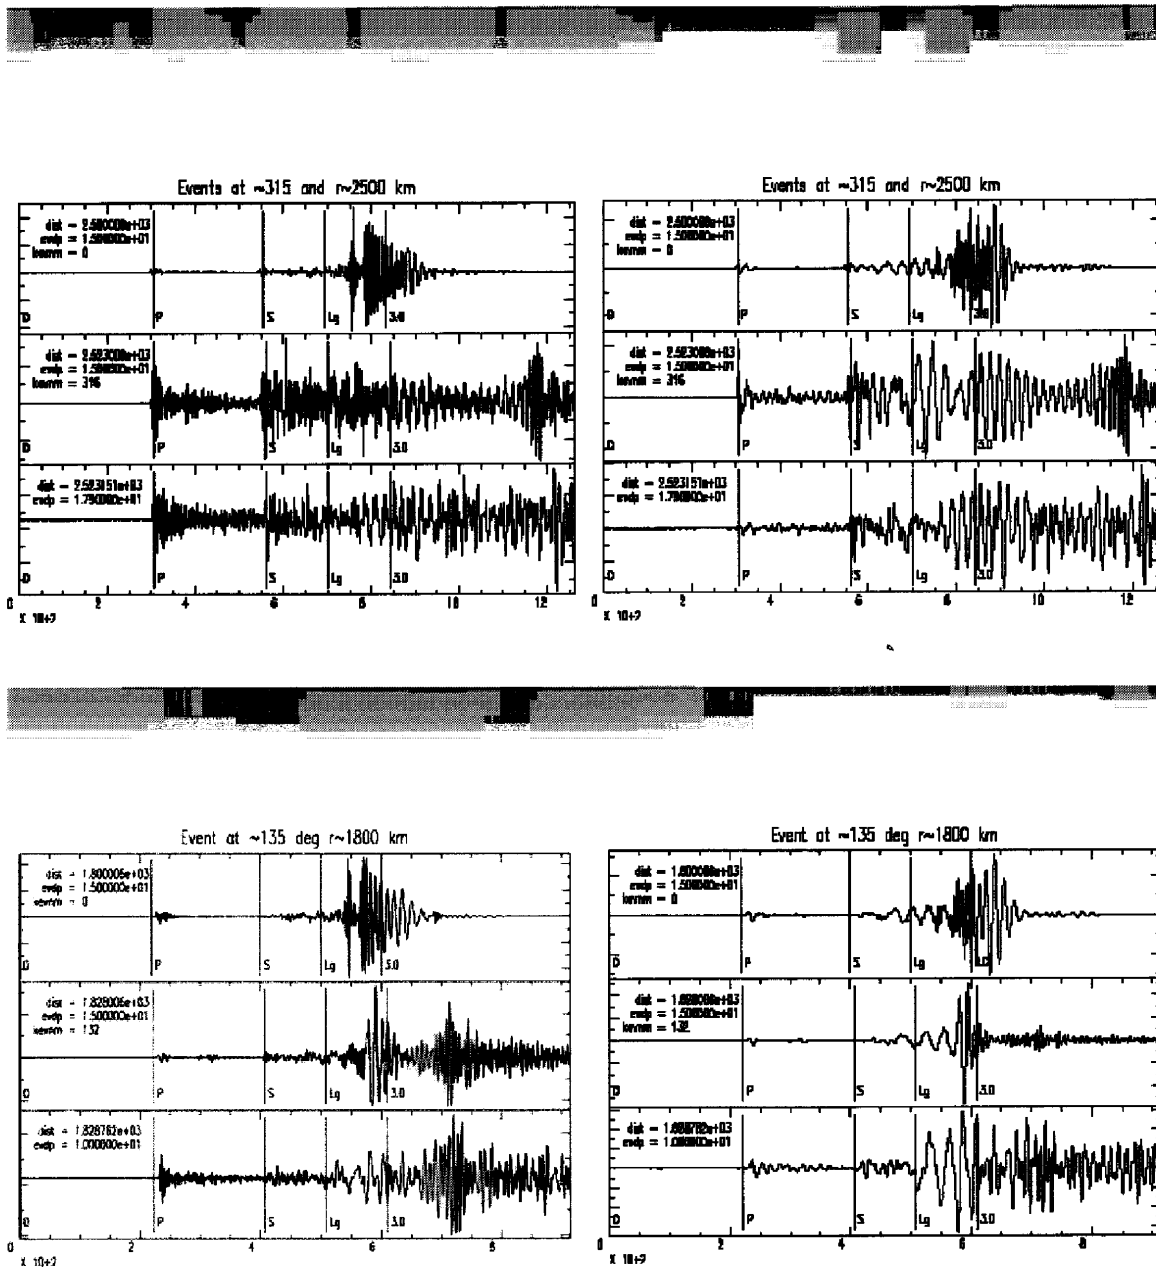


Figure 2. Comparison of data and simulations for earthquakes recorded at RAYN. The top parts of the figure shows the Earth cross section with RAYN at the left edge followed by the data and synthetics for an event at approximately 2500 km. The bottom part of the figure shows the cross section, data, and synthetics for an event to the southeast at a distance of approximately 1800 km. In each sub panel with waveforms, the top trace is the predicted ground motions based on the AK135 earth model. The middle trace is the ground motion prediction based on the MENA model. The bottom trace is the observed data. The sub panels on the left side are broadband data and synthetics. The sub panels on the right side are narrow band filtered around 20 s period. Visual inspection clearly shows that the MENA model improves upon the conventional AK135 model. This improvement is verified quantitatively by comparing observed and predicted group velocity measurements.

In order to quantify the improvement provided by the MENA model, we compared observed and predicted group velocities (Figure 3). As shown in Figure 3, we found that the MENA model significantly reduced the difference between the observed and predicted group velocities relative to AK135. Furthermore, in cases where it did not reduce the residual it was usually as good as AK135. These discrepancies suggest that additional calibration of the MENA model is warranted.

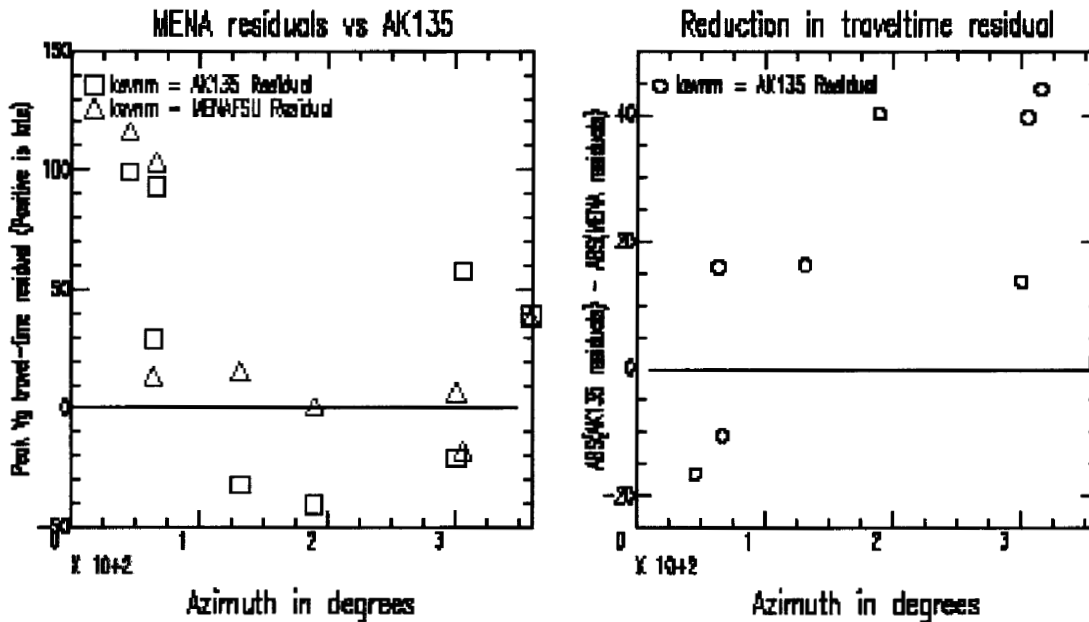


Figure 3. Comparison of observed and predicted group velocities for the MENA and AK135 models. a) Difference between observed and predicted group velocities for the MENA model (green triangles) and AK135 (red squares). b) Relative improvement in predicted group velocities (AK135 residual - MENA residuals).

Constraints on Source Parameters

When possible, we try to avoid potential trade-offs between variability due to source parameters and structure, by estimating source mechanism and depth based on a combination of regional, far-regional, and teleseismic data (e.g., Goldstein and Dodge, 1999, Goldstein et al., 1999). Broadband (Approximately 0 to 2 Hz) body waveforms from the far regional and teleseismic data are modeled using generalized ray synthetics. The regional data are modeled at longer periods (approximately 10 to 100 s) using reflectivity. Grid search and simplex algorithms are used to find the best depth and mechanism for both data sets. When available, we also use source parameters estimated by organizations such as the NEIC and Harvard CMT group.

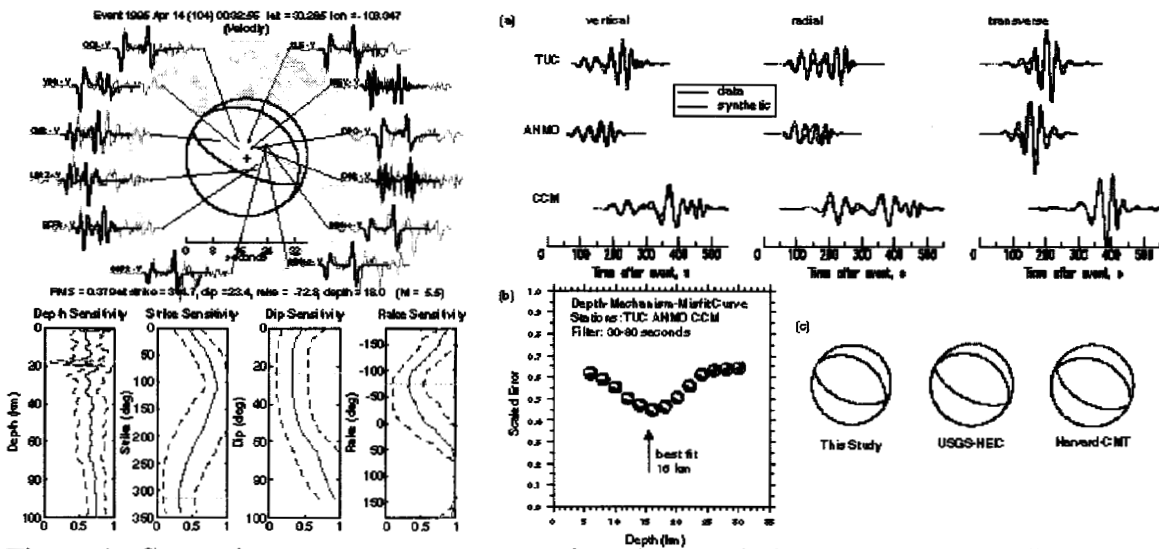


Figure 4. Constraints on source parameters from long period regional, and broadband far regional and teleseismic data help reduce uncertainties and trade-offs between source and model parameters. For example, modeling of far regional and teleseismic bodywave data (left) can provide sharp constraints on depth. Modeling of regional data (right) can provide additional constraints on depth and more accurately constrain mechanism and structure.

Regional Phase Identification

We use numerical simulations of regional wave propagation phenomena to explain and identify anomalous regional S-wave phases (Sx) observed throughout the middle east and north Africa (Figure 5). Understanding and predicting these anomalous regional phases is important because they can have a significant effect on the performance of regional monitoring techniques.

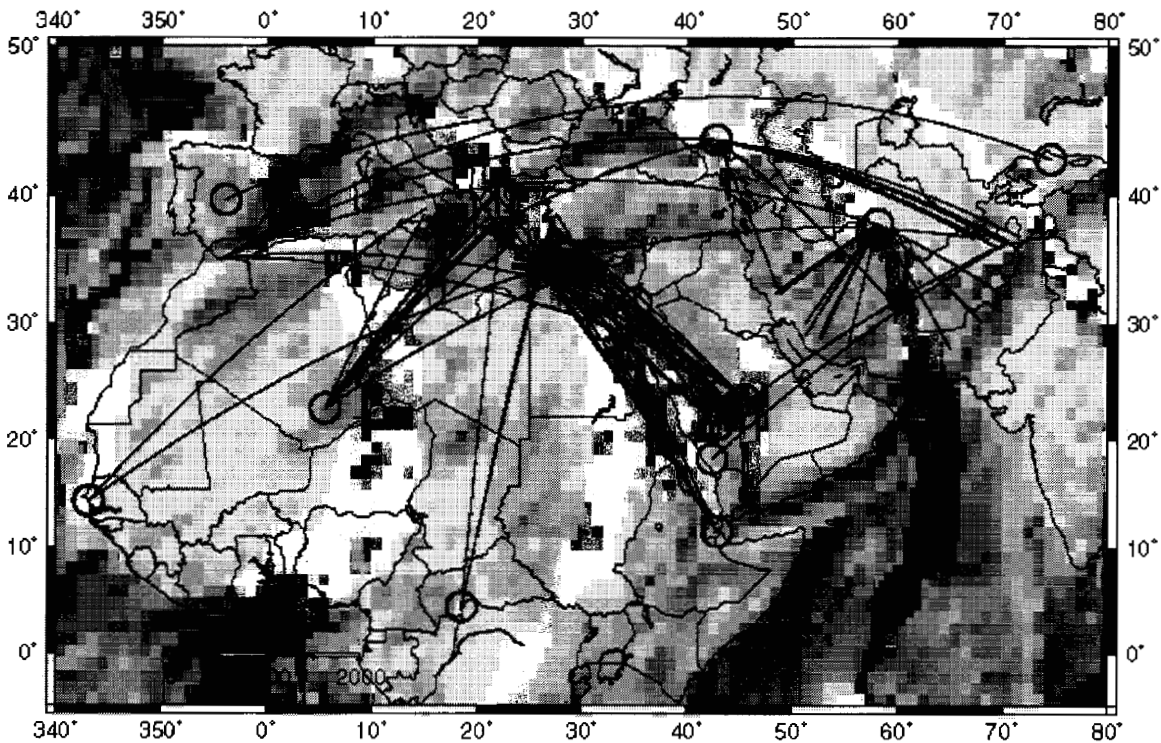


Figure 5, We have observed anomalous, late arriving S-wave phases at numerous stations throughout the Middle East and North Africa. Station locations are indicated as open circles. Event locations are at the tips of the solid lines.

These S phases are considered anomalous and labeled as Sx because they are distinct arrivals with arrival times that differ significantly from what would be predicted for standard regional S phases such as Sn or Lg. They are also consistently observed from event to event at the same station (Figure 6). For example, the Sx phases in Figure 6 have group velocities that are significantly slower than Sn and much too fast to be Lg.

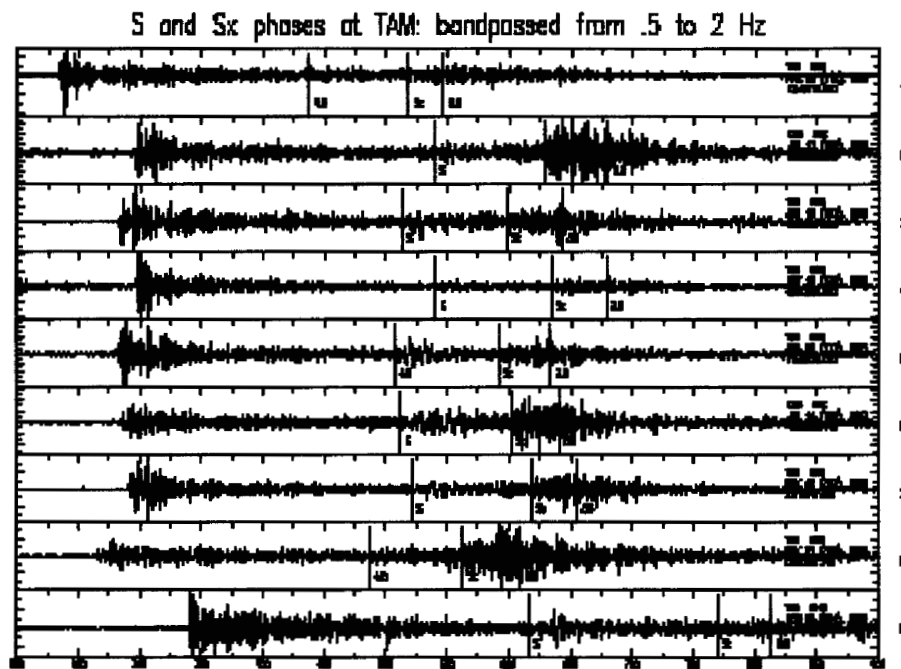


Figure 6. Sx phases recorded on vertical components at TAM. Group velocities of the Sx phases are significant slower than Sn and much to fast to be Lg.

Based on our simulations, we claim that the Sx phases are conversions from Sn to Lg or Lg to Sn depending on the geometry of the crust-mantle boundary between the source and receiver. We have developed a simple analytical model, based on the difference in arrival times of the mantle S-waves and anomalous Sx phases, to predict the locations of the conversion points (Figure 7). These conversion points are found to correlate well with sharp changes in the depth of the crust-mantle boundary (Figure 8).

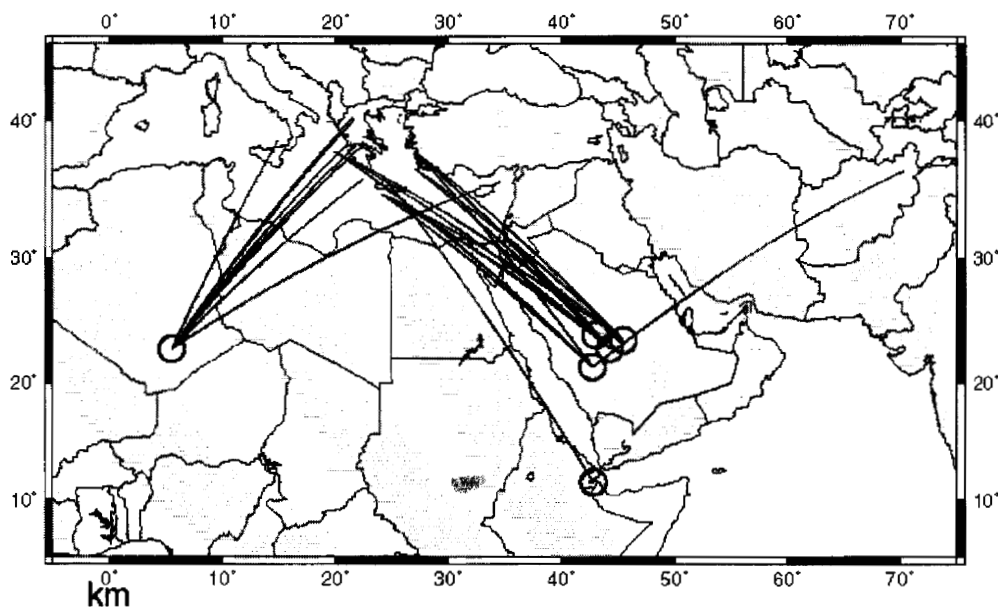


Figure 7. Predicted Sx conversion points based on differences in S and Sx travel-times. The ends of the black lines between the station and event pairs indicate the conversion points.

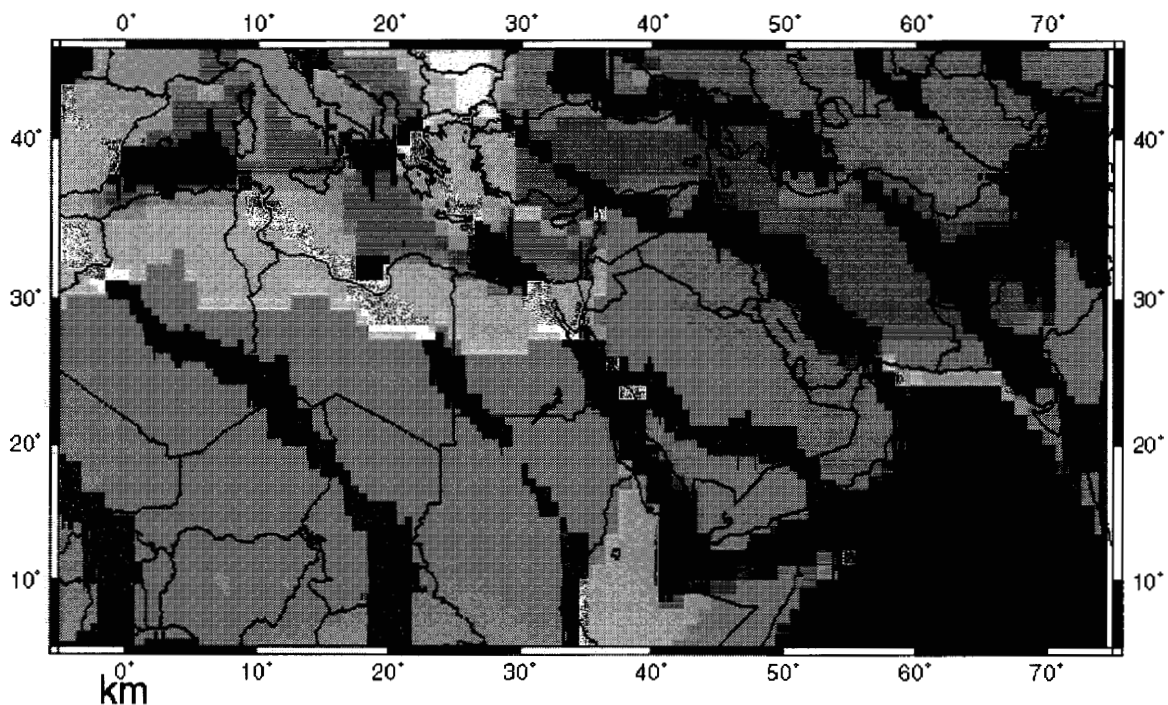


Figure 8. Color-coded map of Moho depth. Red areas are deep and blue areas are shallow. The estimated Sx wave generation points, indicated by the change in line color in Figure 7, occur at places with rapid changes in crustal thickness.

Conclusions

We are using two-dimensional finite-difference wave propagation modeling capabilities to help develop and validate a regional model for the Middle East, North Africa, and the former Soviet Union. Based on quantitative comparison of observed and predicted group velocities we have shown that the MENA model is a significant improvement upon AK135 the conventional model used for monitoring purposes. Qualitative comparison of observed and predicted waveforms also indicates significant improvement.

In order to avoid trade-offs between source and structure we have developed and are utilizing techniques for estimating source parameters from regional, far-regional, and teleseismic data. These techniques can provide high-resolution constraints on source depth and mechanism.

We have documented anomalous regional S phases (Sx) and shown that a simple model based on conversions at sharp changes in crustal thickness can explain the observed anomalous arrival times. The ability to predict such anomalous phases is important for the development of robust regional monitoring techniques.

References

- Goldstein, P., and D. Dodge, (1999) "Fast And Accurate Depth And Source Mechanism Estimation Using P-Waveform Modeling: A Tool For Special Event Analysis, Event Screening, and Regional Calibration", *Geophys. Res. Lett.* 26, 2569-2572, 1999.

Goldstein, P., D. Dodge, G. Ichinose, A. Rodgers, "High Resolution Depth and Source Mechanism Estimation Using a Combination of Regional and Teleseismic data", Presented at the IRIS 2000 workshop, Rockport Maine, May 2000.

Walter, WR, ME. Pasyanos, J. Bhattacharyya, J. O'Boyle, MENA1.1 – An updated geophysical regionalization of the Middle East and North Africa, UCRL-ID-138079, 2000.

This work was performed under the auspices of the U.S. Department of Energy by the University of California, Lawrence Livermore National Laboratory under Contract No. W-7405-Eng-48.